




KW AUFZUGSTECHNIK GmbH
Zimmersmühlenweg 69
D-61440 Oberursel - GERMANY
TEL. ++49 (0) 6171-9895-0 FAX ++49 (0) 6171-9895-19



Einbaukomponenten für Tableaus

Für unsere Steuerungssysteme DAVID-606 / 2005 bieten wir Ihnen vorverdrahtete Innen- und Außentableaus an. Es besteht ein umfangreicher Katalog von Vorzugstableautypen mit den dazugehörigen Tableaukästen, die durch die Wahl der Einbaugeräte geschickt variiert werden können. Die Vorzugstableaus sind kurzfristig lieferbar. Natürlich fertigen wir auch Tableaus nach Ihren Maßen an.

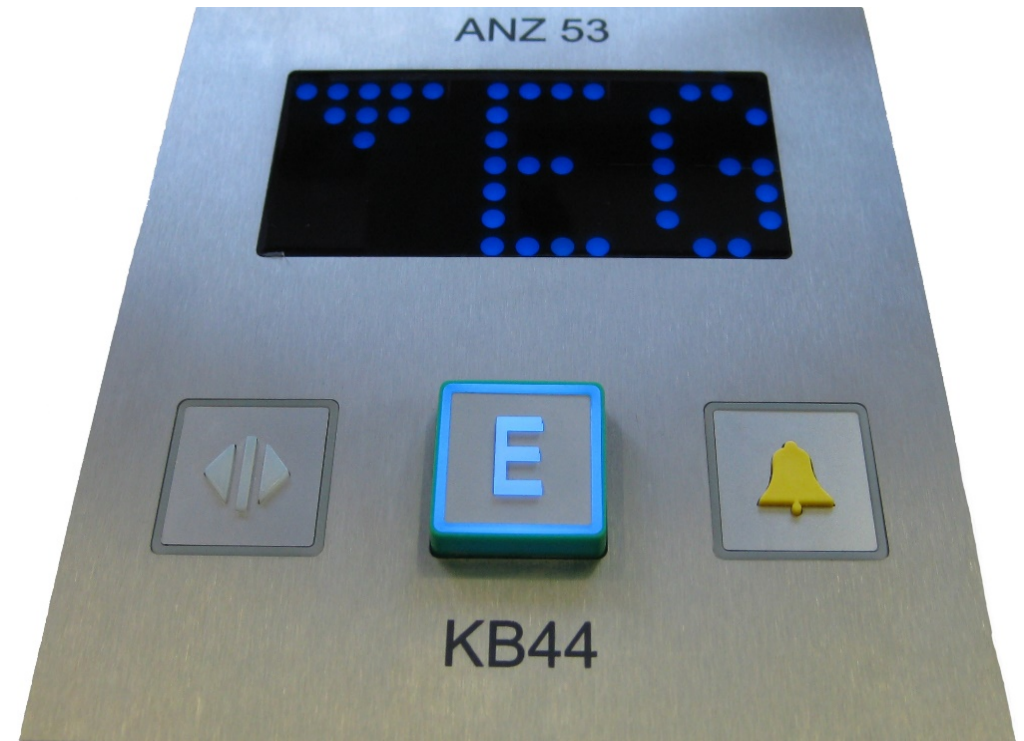

Fixtures For Car- And Landing Panels

For our control systems DAVID-606 / 2005, we offer Car-Operation-Panel and LOP. There is an extensive catalogue of "Priority-Type-Operation-Panels" in associated with the boxes, by the choice of installation units can be cleverly varied. The "Priority-Type-Operation-Panels" can be delivered in short time. Custom made panels according to your measurements are welcome.

Bezeichnung / Type:


KV 44 BL / RT

KV 46 BL / RT

KB 44 BL / RT

KB 46 BL / RT

Ausführung:

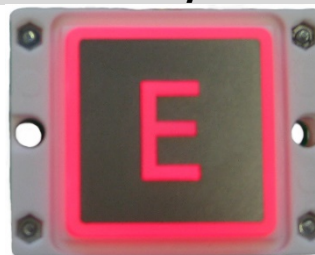

Realization:

Allgemein:

Erhabenes Symbol, Standardmäßig mit Braille, außer Servicetaster. Tastplatte Edelstahl kugelgestrahlt, matt. Ziffer brüniert. Die Tastplatte in Schwarz ist optional lieferbar.

Erhabenes Symbol, Standardmäßig mit Braille, außer Servicetaster. Tastplatte Edelstahl kugelgestrahlt, matt. Ziffer brüniert. Die Tastplatte in Schwarz ist optional lieferbar.

Erhaben (nach EN-81-70), Farbe rot oder blau, bzw. Alarmtaster Farbe Gelb. Leuchtring und Symbol, 8 LEDs, mitleuchtend.

Erhaben (nach EN-81-70), Farbe rot oder blau, bzw. Alarmtaster Farbe Gelb. Leuchtring und Symbol, 8 LEDs, mitleuchtend.

General:

Raised symbol, red or blue light ring or yellow light ring alarm button No Braille. Touch plate stainless steel, shot peened, matt. Burnished digit.

Raised symbol, illuminated ring red or blue or alarm button illuminated ring yellow with Braille as standard, except for service button: door open, door closed and alarm Touch plate stainless steel, shot peened, matt. Burnished digit

Indicator-ring consists of 8 LEDs, colour of red or blue, the alert-push-button in yellow. Execution taktil, EN-81-70, alert-push-button in yellow.

Indicator-ring consists of 8 LEDs, colour of red or blue, the alert-push-button in yellow. Execution taktil, EN-81-70, alert-push-button in yellow.

Befestigungsart:

Montage frontal, rückseitig mit Rastring befestigt. Frontplattenstärke bis 3mm.

Montage frontal, rückseitig mit Schraubring befestigt. Frontplattenstärke bis 3mm.

Montage mit Schweißbolzen, Frontplattenstärke 2mm.

Montage mit Schweißbolzen, Frontplattenstärke 2mm.



Attachment:

Frontal mounting, fastened on the back with a snap ring. Front panel thickness up to 3mm. Opt.: IP54 Schutzart

Frontal mounting, fastened on the back with screw ring. Front panel thickness up to 3mm.





Mounting with screwbolts, designed for panels with 2mm thickness

Mounting with screwbolts, designed for panels with 2mm thickness



Elektr. Anschlussbild:

Wiring:

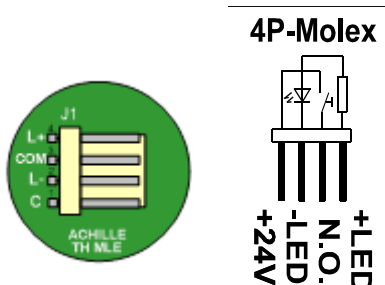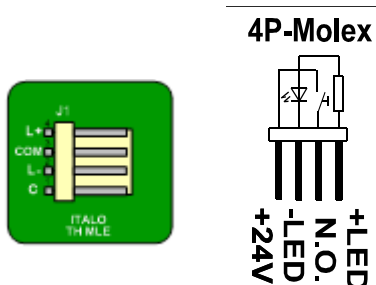



KV 46-V BL / RT

KW 66 BL / GR / RT

KB 60 BL / RT

KB 66 BL / RT

Bezeichnung /
Type:
Ausführung:

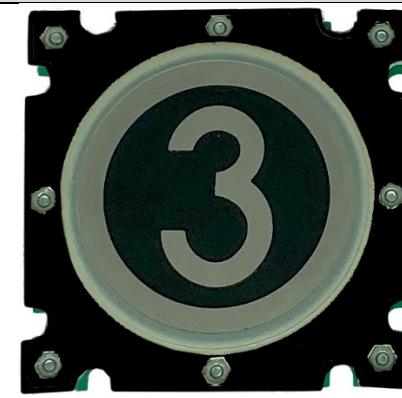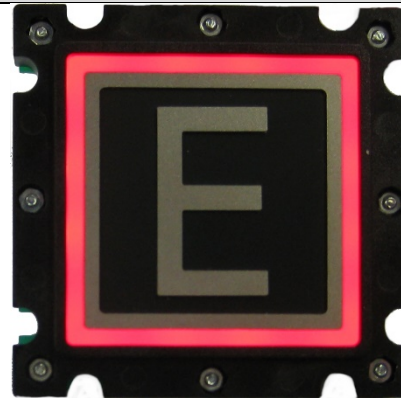

Realization:

Vandalen sicher nach **Klasse 2 (nach EN81-71 Class 2) IP54**
Erhabenes Symbol. Kein Braille.
Tastplatte Edelstahl kugelgestrahlt, matt. Ziffer brüniert.
Vandal resistant class 2 (according to EN81-71) Raised symbol, No Braille. Touch plate stainless steel, shot peened, matt. Burnished digit.

Vandalen resistent Class 2 & IP 67 wasserfest (nach EN-81-71 & 72), Leuchtring, 6 LEDs Farbe Rot und Grün. Alarmtaster Farbe Gelb.
Execution vandalism safe class 2 & water protected, EN-81-71 & 72, k, alert-push-button in yellow. Indication-ring consists of 6 LED, red and green colour, the alert-push-button is in yellow.

Erhaben (nach EN-81-70), Farbe Schwarz, bzw. Alarmtaster Farbe Gelb. Leuchtring, 16 LEDs Farbe Rot oder Blau, bzw. Alarmtaster Farbe Gelb; *Execution blazing, EN-81-70, Indication-ring of 16 LEDs, red or blue colour, the alert-push-button is in yellow.*

Erhaben (nach EN-81-70), Farbe Schwarz, bzw. Alarmtaster Farbe Gelb. Leuchtring, 16 LEDs Farbe Rot oder Blau, bzw. Alarmtaster Farbe Gelb; *Execution blazing, EN-81-70, Indication-ring of 16 LEDs, red or blue colour, the alert-push-button is in yellow.*

Allgemein:

General:

Montage frontal, rückseitig mit Schraubring befestigt. Frontplattenstärke bis 5mm. **IP54**
Frontal mounting, fastened on the back with screw ring. Front panel thickness up to 5mm. IP54

Montage Frontplatte und Drehring, Frontplattenstärke bis 3mm.
Attachment through the front paneel, designed for panels with 2-3mm thickness.

Montage mit Schweißbolzen, Frontplattenstärke 2-3mm.
Mounting with screwbolts, for panels with 2-3mm thickness.

Montage mit Schweißbolzen, Frontplattenstärke 2-3mm.
Mounting with screwbolts, for panels with 2-3mm thickness.

Befestigungsart:

Attachment:



Elektr. Anschlussbild

Wiring:

